



▼ HYDAF DISSOLVED AIR FLOTATION SYSTEMS MUNICIPAL HD RANGE

Designed specifically for municipal wastewater treatment...

- ▶ The HyDAF Dissolved Air Flotation system's simplicity and exceptional performance in municipal applications are just two of the reasons why the HyDAF is the Dissolved Air Flotation system of choice for municipal wastewater treatment today.



- ▶ The Hydroflux HD-DAF system is specially designed for the treatment of municipal wastewater with proven systems successfully operating in numerous applications.

“Australia’s most experienced wastewater treatment company”



Key features of the HyDAF...

SCRAPER¹


The HyDAF Scraper is a heavy duty, low maintenance, roller chain system with multiple blades that minimises the water content in the removed float.

ENCLOSURE²

The scraper is fully enclosed and facilitates odour extraction and control and contains all wash-water overspray. It is designed with a completely clean and smooth exterior.

BEARINGS³

Externally mounted bearings that allow maintenance without the removal of guards.

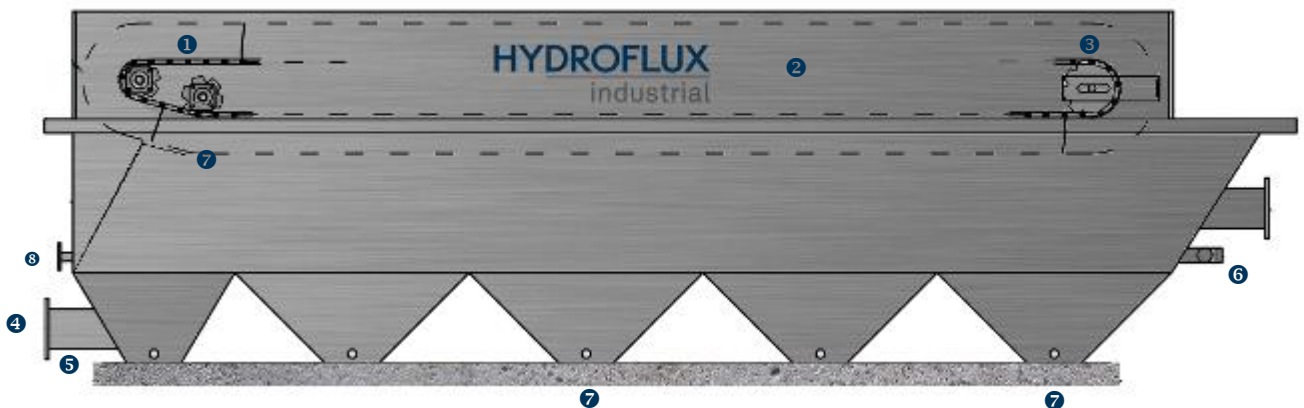

INLET⁴

A specially designed hex-mixer installed at the inlet of the HyDAF system optimises contact of the dissolved air stream with the wastewater to improve bubble attraction and enhance performance compared to traditional units.

DISSOLVED AIR^{5 6}

The dissolved air stream is formed by using treated wastewater from the outlet of the HyDAF (6) pressurising it with air in a dissolved air saturator and injecting the stream back at the inlet (5). The dissolved air system is an automated continuous, non-blocking process.

SLUDGE^{7 8}


Sludge is scraped from the surface into the sludge hopper (7) from where it is typically pumped to a sludge storage tank for dewatering or disposal.

The base of the HyDAF is designed with hoppers (7) to facilitate settled sludge removal without fully draining the system.

An optional bottom sludge removal screw can be provided



High efficiency, low power and extremely small air bubbles for maximum performance.

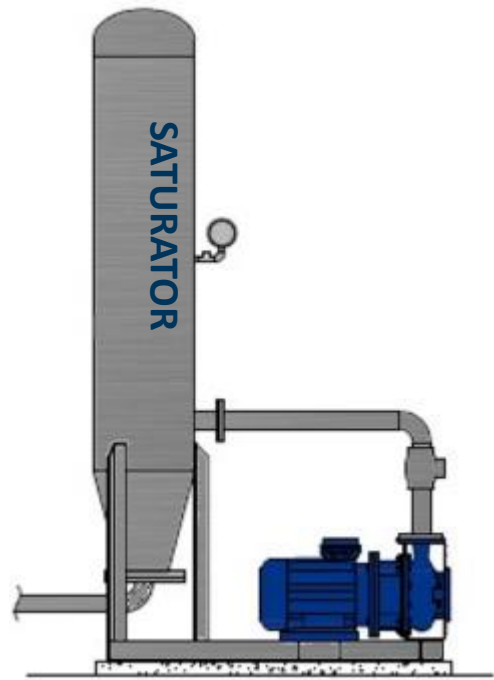

- ▶ A recycle stream of treated effluent is taken from the discharge end of the HyDAF and is pressurised to 450 kPa.

This pressurised flow is injected into a specially designed Hydroflux dissolved air saturator. Air is added to the saturator to maintain a “headspace” which acts to provide contact between the air and the treated effluent and it is here that air is dissolved into the recycle stream.

To precipitate the dissolved air back into the effluent as microscopic air bubbles, the pressure is relieved through a unique pressure regulating valve. This promotes perfectly sized microscopic bubbles to maximise performance.

Simple, compact and effective

▶ The Hydroflux HyDAF HD range of DAF systems offer superior performance in terms of wastewater quality and sludge dryness over other conventional dissolved air flotation units:

- Proven counter-current scraping system providing improved performance and drier sludge.
- Ability to handle very high solids or grease loadings using one of a range of select recycle systems to provide guaranteed air to solids ratios in all cases.
- Removal of heavy and neutral density particles whilst producing two distinct, easily separable phases – the treated water and surface sludge.
- Power and air consumption are very low, maintenance is infrequent and the volume of sludge generated is considerably reduced due to the system's inherent sludge thickening nature.



HYDROFLUX
epco

We know that every plant is different...

- ▶ The HyDAF system is the central hardware of the wastewater treatment plant but it is surrounded by expertly designed ancillary components that ensure the overall treatment system is simple to operate and maintain with optimum performance.



- ▶ Our engineers have installed hundreds of DAF systems and have invaluable design and operating experience to ensure that the system is tailored specifically for your facility.

Applications

- Applications for the HyDAF dissolved air flotation system in Municipal Sewage and Drinking Water Plants include:
- Waste Activated Sludge (WAS) Thickening – with and without polymer dosing
 - Potable Water Treatment – raw water clarification from dams, rivers and ponds
 - Algae Removal from treatment ponds and lagoons.
 - Phosphorous Removal from secondary treatment applications
 - Pre-Treatment to Advanced Membrane Filtration (MF and UF)
 - Seawater Clarification



HYDROFLUX
epco

Designed and Manufactured in Australia...

- ▶ The HyDAF system is fabricated in Australia in a range of sizes to suit any municipal application with a dissolved air unit matched to the solids load in each case.



HyDAF HD model number	Typical flow range (kL/hr)	Typical WAS Thickening (kL/hr)
HD10	5 - 15	2 - 4
HD20	15 - 25	4 - 8
HD35	35 - 40	7 - 14
HD50 / HD50V	40 - 60	10 - 20
HD75 / HD75V	65 - 85	15 - 30
HD100 / HD100V	85 - 120	20 - 40
HD200 / HD200V	150 - 255	30 - 60
HD300	250 - 350	45 - 95
HD500	400 - 600	80 - 150

FlooDAF model number	Typical flow range (kL/hr)
FlooDAF49	365 - 425
FlooDAF65	500 - 625
FlooDAF115	650 - 750
FlooDAF149	800 - 990

- Engaging a professional wastewater treatment company to look after the entire wastewater project is a convenient, economical and hassle free option for industry.

Hydroflux Epco can provide all process design works, manufacture and fabrication, construction and even complete operation of your wastewater treatment plant.

When Hydroflux Epco provides complete solutions, we can either undertake a contract on a turnkey basis or work together with building services engineers and other construction professionals to ensure that the project is delivered smoothly, without interruption and on time.



HYDROFLUX
epco

Hydroflux Epco Pty Ltd

Australia and Australasia

Head Office:

Level 26, 44 Market Street
Sydney NSW 2000 Australia

Victorian Office:

84 Hotham St. Preston
VIC 3072 Australia

Sutherland Engineering Office:

3-5 Stapleton Ave.
Sutherland NSW 2232 Australia

Queensland Office:

1 Westlink Court
Darra QLD 4076

Int: +61 2 9089 8833

Aus: 1300 417 697

info@hydrofluxepco.com.au

www.hydrofluxepco.com.au

New Zealand

Head Office:

Level 26, PwC Tower
188 Quay St
Auckland 1010, New Zealand

Int: +64 9 352 2052

NZ: 09 352 2052

info@hydroflux.nz

www.hydroflux.nz

Fiji and Pacific Islands

Head Office:

Suva Business Centre
217 Victoria Parade
Suva, Fiji

Int: +679 773 6950

Fiji: 773 6950

info@hydroflux.com.fj

www.hydroflux.com.fj

United Kingdom and Europe

Head Office:

1000 Lakeside North Harbour Western Road
Portsmouth PO6 3EZ

Int: +44 23 9270 4087

UK: 0239 270 4087

info@hydroflux.uk

www.hydroflux.uk

ISO 45001 SAFETY MANAGEMENT SYSTEM



Certificate Number: 4774801610007

ISO 14001 ENVIRONMENTAL MANAGEMENT SYSTEM



Certificate Number: 47714001610007

ISO 9001 QUALITY MANAGEMENT SYSTEM



Certificate Number: 4779001610007

ISO 31000 RISK MANAGEMENT SYSTEMS



Certificate Number: 477310006176001

LogMax®, VeeMax®, HeadMax®, CoverSweep®, CleanSweep®, RoadTrain®, HyBand®, BioCap®,
LanceMix®, FlareWell® & EPCO® are all registered trademarks of Hydroflux Epco Pty Ltd